



### ***Affordable Balance to Achieve Reliable Results***

The Pioneer PX combines essential weighing functionality with competitive performance, offering high accuracy and repeatability for applications in laboratory, industrial and education settings. The PX is affordably priced, intuitively designed for intelligent operation with a second line display for additional information, and USB and RS-232 connectivity for easy communication.

#### ***Unique Features Include:***

- The PX offers high accuracy and repeatability for essential weighing applications in laboratory, industrial and education settings at an economical price point.
- Featuring a cast metal lower housing, sub-pan and stainless steel weighing pan, the PX is durably constructed for versatile, long-term use.
- PX features a second line display for additional information/guidance, & USB/RS232 connectivity for easy communication. Draftshield models feature a static removal (ESR) bar for convenient grounding.

# PIONEER® *Semi-Micro, Analytical and Precision Balances*

Durably constructed of cast metal lower housing, metal sub-pan and stainless steel weighing pan for long-term use.

A static removal bar (constructed of permanent static electric dissipative ABS) provides a convenient grounding location.

RS-232 and USB device ports allow for easy connectivity to PCs and PLCs. Equipped with a security lock to prevent unauthorized use.



Large viewing angle with bright backlit LCD display.

Two line display provides additional information or guidance prompts to the user.

Four quick keys enable easy operation of multiple weighing modes.




| InCal™ Models                                              | PX85*                                                                                                                                                                                              | PX225D*   | PX84             | PX124    | PX224   | PX163             | PX323    | PX523   | PX623   |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|----------|---------|-------------------|----------|---------|---------|
| ExCal Models                                               |                                                                                                                                                                                                    |           | PX84/E           | PX124/E  | PX224/E | PX163/E           | PX323/E  | PX523/E | PX623/E |
| Capacity (g)                                               | 82                                                                                                                                                                                                 | 82/220    | 82               | 120      | 220     | 160               | 320      | 520     | 620     |
| Readability d, Fine Range (g)                              |                                                                                                                                                                                                    | 0.00001   |                  | -        |         |                   | -        |         |         |
| Readability d, Full Range (g)                              | 0.00001                                                                                                                                                                                            | 0.0001    |                  | 0.0001   |         |                   | 0.001    |         |         |
| Repeatability (sd.), ≤5% of Full Load (g)                  |                                                                                                                                                                                                    | 0.00001   |                  | 0.00008  |         |                   | 0.0008   |         |         |
| Repeatability (sd.), 5% of Full Load to Fine Range Max (g) |                                                                                                                                                                                                    | 0.00002   |                  | -        |         |                   | -        |         |         |
| Repeatability (sd.), Fine Range Max to Full Range (g)      | 0.00002                                                                                                                                                                                            | 0.0001    |                  | 0.0001   |         |                   | 0.001    |         |         |
| Linearity deviation, Typical (g)                           |                                                                                                                                                                                                    | ± 0.00006 |                  | ±0.00006 |         |                   | ± 0.0006 |         |         |
| Linearity deviation (g)                                    |                                                                                                                                                                                                    | ± 0.0001  |                  | ± 0.0002 |         |                   | ± 0.002  |         |         |
| Stabilization Time (s)                                     |                                                                                                                                                                                                    | 10        |                  | 3        |         |                   | 2        |         |         |
| Units                                                      | Milligram, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Troy Ounce, Grain, Newton, Hong Kong Tael, Singapore Tael, Taiwan Tael, Momme, Tical (MM), Mesghal, Tola (India), Baht, 1 custom unit |           |                  |          |         |                   |          |         |         |
| Applications                                               | Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination                                                                                                           |           |                  |          |         |                   |          |         |         |
| Pan Size (Ø)                                               | 3.15 in. / 80 mm                                                                                                                                                                                   |           | 3.54 in. / 90 mm |          |         | 4.72 in. / 120 mm |          |         |         |
| Draftshield Size                                           | 6.8 × 5.2 × 8.1 in. / 172 × 131 × 205 mm                                                                                                                                                           |           |                  |          |         |                   |          |         |         |
| Power Supply                                               | Power Input: 100–240V ~ 200mA 50–60Hz 12–18VA<br>Power Output: 12 VDC 0.5A                                                                                                                         |           |                  |          |         |                   |          |         |         |
| Assembled Dimensions (W × D × H)                           | 8.2 × 12.6 × 12.2 in. / 209 × 321 × 309 mm                                                                                                                                                         |           |                  |          |         |                   |          |         |         |
| Operating Conditions                                       | Operating conditions for ordinary lab application: 50° F to 86° F / +10 to 30° C<br>(operability guaranteed between +5 and 40° C)                                                                  |           |                  |          |         |                   |          |         |         |
| Storage Conditions                                         | 14° F to 140° F / -10° C to 60° C at 10% to 90% relative humidity, non-condensing                                                                                                                  |           |                  |          |         |                   |          |         |         |
| Net Weight                                                 | 10 lb / 4.5 kg                                                                                                                                                                                     |           |                  |          |         |                   |          |         |         |
| Shipping Weight                                            | 15.4 lb / 7 kg                                                                                                                                                                                     |           |                  |          |         |                   |          |         |         |
| Shipping Dimensions (W × D × H)                            | 21.7 × 15.2 × 11.5 in. / 507 × 387 × 531 mm                                                                                                                                                        |           |                  |          |         |                   |          |         |         |

\*Automatic Calibration models

# PIONEER® *Semi-Micro, Analytical and Precision Balances*

RS-232 and USB device ports allow for easy connectivity to PCs and PLCs. Equipped with a security lock to prevent unauthorized use.

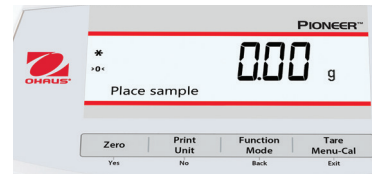

Large viewing angle with bright backlit LCD display.

Two line display provides additional information or guidance prompts to the user.


Four quick keys enable easy operation of multiple weighing modes.



| InCal™ Models                                           | PX1602                                                                                                                                                                                             | PX2202   | PX3202   | PX4202   | PX6202   | PX2201   | PX4201   |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|
| ExCal Models                                            | PX1602/E                                                                                                                                                                                           | PX2202/E | PX3202/E | PX4202/E | PX6202/E | PX2201/E | PX4201/E |
| Capacity (g)                                            | 1600                                                                                                                                                                                               | 2200     | 3200     | 4200     | 6200     | 2200     | 4200     |
| Readability (g)                                         | 0.01                                                                                                                                                                                               |          |          | 0.1      |          |          |          |
| Repeatability (sd.), ≤5% of Full Load (g)               | 0.008                                                                                                                                                                                              |          |          | 0.08     |          |          |          |
| Repeatability (sd. ), 5% of Full Load to Full Range (g) | 0.01                                                                                                                                                                                               |          |          | 0.1      |          |          |          |
| Linearity deviation, Typical (g)                        | ± 0.006                                                                                                                                                                                            |          |          | ± 0.06   |          |          |          |
| Linearity deviation (g)                                 | ± 0.02                                                                                                                                                                                             |          |          | ± 0.2    |          |          |          |
| Stabilization Time (s)                                  | 1                                                                                                                                                                                                  |          |          |          |          |          |          |
| Units                                                   | Milligram, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Troy Ounce, Grain, Newton, Hong Kong Tael, Singapore Tael, Taiwan Tael, Momme, Tical (MM), Mesghal, Tola (India), Baht, 1 custom unit |          |          |          |          |          |          |
| Applications                                            | Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination                                                                                                           |          |          |          |          |          |          |
| Pan Size (Ø)                                            | 7.09 in. / 180 mm                                                                                                                                                                                  |          |          |          |          |          |          |
| Draftshield Size                                        | N/A                                                                                                                                                                                                |          |          |          |          |          |          |
| Power Supply                                            | Power Input: 100–240V ~ 200mA 50–60Hz 12–18VA<br>Power Output: 12 VDC 0.5A                                                                                                                         |          |          |          |          |          |          |
| Assembled Dimensions (W × D × H)                        | 8.2 × 12.6 × 3.9 in. / 209 × 321 × 98 mm                                                                                                                                                           |          |          |          |          |          |          |
| Operating Conditions                                    | Operating conditions for ordinary lab application: 50° F to 86° F / +10 to 30° C<br>(operability guaranteed between +5 and 40° C)                                                                  |          |          |          |          |          |          |
| Storage Conditions                                      | 14° F to 140° F / -10° C to 60° C at 10% to 90% relative humidity, non-condensing                                                                                                                  |          |          |          |          |          |          |
| Net Weight                                              | 7.7 lb / 3.5 kg                                                                                                                                                                                    |          |          |          |          |          |          |
| Shipping Weight                                         | 11 lb / 5 kg                                                                                                                                                                                       |          |          |          |          |          |          |
| Shipping Dimensions (W × D × H)                         | 21.7 × 15.2 × 11.5 in. / 550 × 385 × 291 mm                                                                                                                                                        |          |          |          |          |          |          |

# PIONEER® *Semi-Micro, Analytical and Precision Balances*

## Outline Dimensions

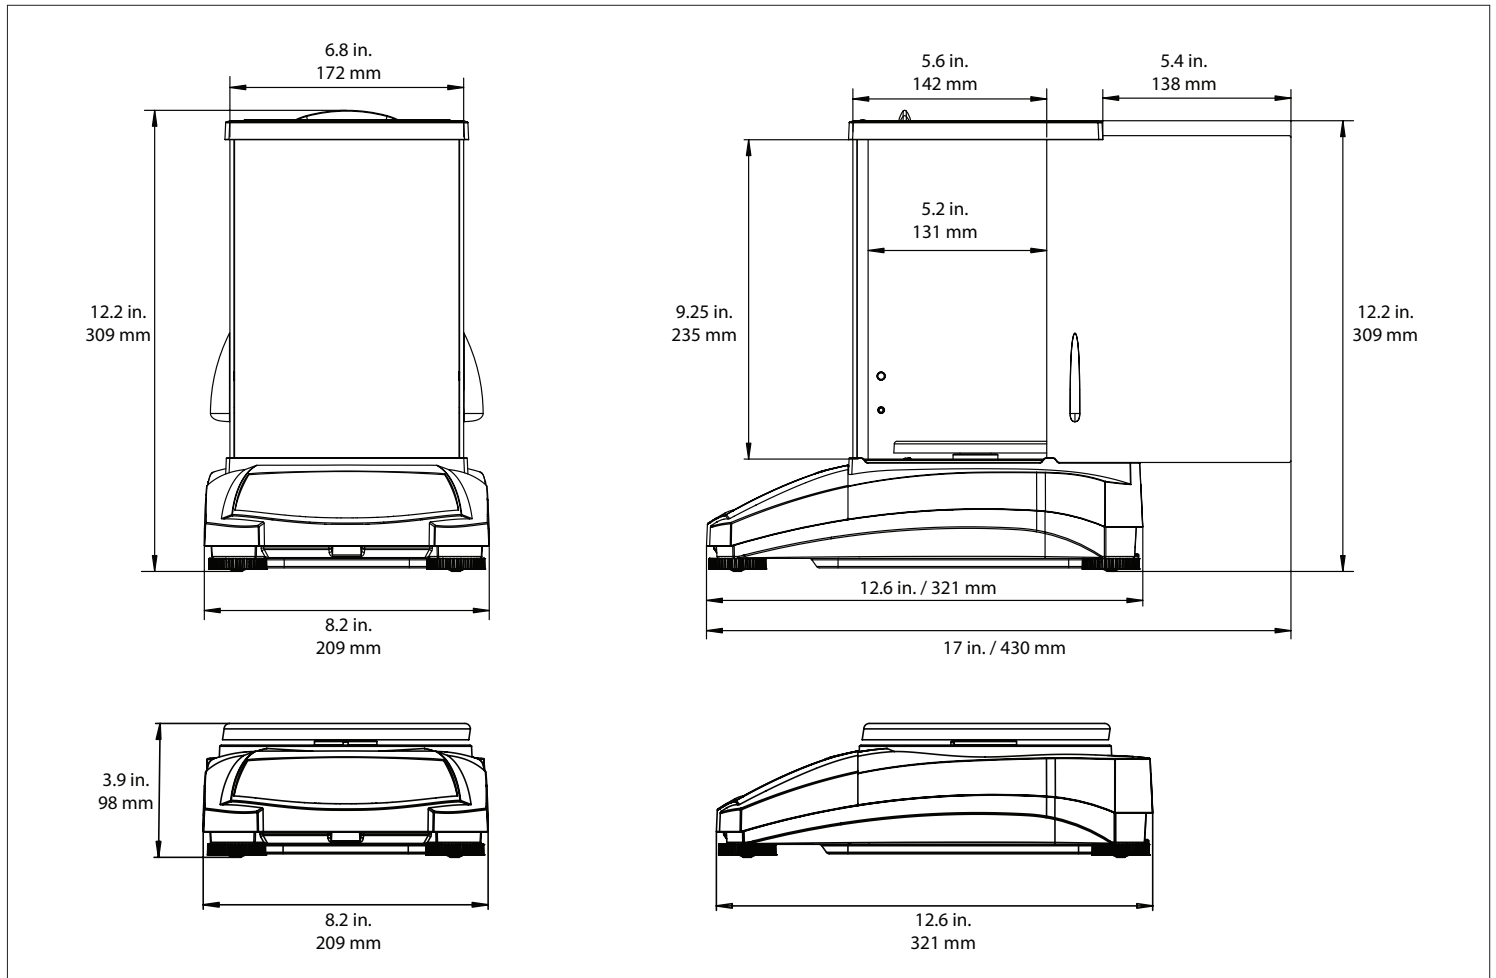

## Other Standard Features and Equipment

Metal base, plastic top housing, removable stainless steel pan, removable glass draftshield or side doors, Real Time Clock with GLP/GMP Data, integrated weigh-below-hook, security bracket, calibration lock and in-use cover, user-selectable environmental filters and brightness settings, auto-tare, auto-dim, user-selectable span calibration points, overload indicator, software lockout and reset menu, user-selectable communication settings and data print options, user-definable project and user IDs, software overload/underload indicator, stability indicator, 11 operating languages

## Compliance

- **Product Safety:** IEC/EN 61010-1; CAN/CSA C22.2 61010-1; UL 61010-1
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, Basic Environments; FCC Part 15 Class A; Canada ICES-003 Class A
- **Compliance Marks:** CSA

## Accessories

|                                             |          |
|---------------------------------------------|----------|
| Auxiliary Display .....                     | 30472064 |
| Density Kit .....                           | 80253384 |
| Sinker Glass for Density Determination..... | 83034024 |
| USB Interface Cable .....                   | 83021085 |
| Security Device .....                       | 80850043 |
| RS-232 Cable (25-pin) .....                 | 80500524 |
| RS-232 Cable (9-pin).....                   | 80500525 |
| Dust Cover .....                            | 30093334 |
| In-Use Cover .....                          | 30372546 |
| Printer SF40A .....                         | 30064203 |
| ION-100A .....                              | 30130302 |

## OHAUS CORPORATION

7 Campus Drive  
Suite 310  
Parsippany, NJ 07054 USA

Tel: 800.672.7722

973.377.9000

Fax: 973.944.7177

[www.ohaus.com](http://www.ohaus.com)

*The management system governing the manufacture of this product is ISO 9001:2015 certified.*

