

MDF-C2156VANC-PA

-150°C Cryogenic Freezer

Safe, Economical Air Phase Cryogenic Storage 8.2 cu. ft. | 232.2 L
Without Liquid Nitrogen



MDF-C2156VANC-PA

The PHCbi brand -150°C cryogenic freezer offers air-phase cryogenic storage without the need for liquid nitrogen as the primary cooling medium. The hybrid autocascade refrigeration system delivers superior uniformity at cryogenic temperatures without stratification.

Reliable Sample Security

Powered by a robust autocascade refrigeration system, this chest freezer delivers superior cooling and temperature performance, leading to faster pull-down speeds and unsurpassed temperature uniformity throughout the freezer chamber. Performance and reliability are not dependent on LN₂.

High Capacity Storage, Minimal Footprint

The use of patented VIP Plus cabinet insulation technology dramatically reduces cabinet wall thickness, allowing for higher capacity storage in a smaller footprint. This efficient layout enables storage of up to (150) 2" boxes or (105) 3" boxes, requiring only 13.07 sq.ft (1.15 m²) of lab space.

Safe, Economic Alternative

This innovative PHCbi brand -150°C cryogenic freezer eliminates hazardous operating conditions and frequent maintenance and cost requirements associated with LN₂ storage, and minimizes the possibility of cross-contamination among multiple samples in cryogenic storage.



Energy Efficiency

Energy efficiency in our cryogenic freezers is achieved through balanced temperature performance and power management, making them an ideal and economical choice when replacing existing liquid nitrogen freezers or installing new long-term product storage systems.



Precise Temperature Control

The integrated microprocessor-based controller and LCD graphic display enable intuitive management and monitoring of critical set points using a precise, long-lasting platinum RTD sensor, including touch keypads for setting freezer functions. Audible and visual alarms alert the user of out of range conditions.



Extra Protection, Easy Access

An insulated locking lid with sub-lids helps minimize cold air loss during routine access. The composite freezer wall insulation protects internal temperatures and improves tolerance for high ambient temperatures.

MDF-C2156VANC-PA




MDF-C2156VANC-PA

Temperature


The graphs below show temperatures at different locations within the chamber. This data demonstrates that 100% of the storage maintains uniform storage temperatures safely below -130°C , while temperature in LN_2 vapor system is dependent on storage location.

Liquid Nitrogen Freezer Vapor Phase




Model MDF-C215VANC-PA

Mechanically Refrigerated Cryogenic Freezer




Comparison of temperature distribution in a LN_2 freezer (vapor phase) and Model MDF-C2156VANC-PA mechanically refrigerated cryogenic freezer.

Model Number		MDF-C2156VANC-PA
External Dimensions (W x D x H) ¹⁾	inches mm	68.1 x 30.1 x 39.8 1730 x 765 x 1010
Internal Dimensions (W x D x H)	inches mm	29.9 x 19.5 x 24.2 760 x 495 x 615
Volume	cu.ft. liters	8.2 231
Net Weight	lbs kg	701 318
Capacity (2" boxes)	qty	150
Capacity (3" boxes)	qty	105
Inventory Racks (2" boxes)	qty	15
Inventory Racks (3" boxes)	qty	15
Performance		
Warranty ²⁾		2 years plus 5 year compressor parts
Cooling Performance ³⁾	$^{\circ}\text{C}$	-150
Temperature Setting Range ³⁾	$^{\circ}\text{C}$	-125 to -152
Temperature Control Range ³⁾	$^{\circ}\text{C}$	-125 to -150
Control		
Controller		Microprocessor
Display		LCD
Temperature Sensor		Pt-1000
Refrigeration		
Refrigeration System		Cascade with auto-cascade low stage
Compressors	W	(2) 1100, variable speed
Refrigerant		High-stage HFC Low-stage HFC Mixed
Insulation Thickness, Material	inches mm	5.31 135, rigid polyurethane foam (PUF) + VIP Plus vacuum insulated panels
Construction		
Exterior Material		Painted steel
Interior Material		Aluminum
Outer Door	qty	1 (key lock with provision for optional pad lock)
Inner Doors	qty	2 (insulated, ABS, stainless steel frames, positive latches)
Access Ports	qty	1: near temperature sensor
Access Port Diameter	inches mm	.5 12.7
Casters	qty	6 (3 leveling feet on front base)
Alarms		(V = Visual Alarm, B = Buzzer Alarm, R = Remote Alarm)
Power Failure		V-B-R
Temperature (High and Low)		V-B-R
Sensor Failure		V-B-R
Lid Open		V-B
Remote Alarm Contacts		DC 30V 2A (normally open, normally closed, common)
Electrical and Noise Level		
Power Supply		220V, 1Ø, NEMA 6-20P, requires NEMA 6-20R receptacle
Noise Level ⁴⁾	dB(A)	51
Temperature Recorder		
Circular Type	6", 7 day circular	MTRC954
Chart Paper	52 charts per box	C72101106REV (-210 $^{\circ}\text{C}$ to +110 $^{\circ}\text{C}$)
Ink Pen	pack of 6	R252
Optional Communication System		
Wireless, Cloud-Based, Automatic Data Management		LabAlert [®] Monitoring System

Dimensions

Unit : inch | mm

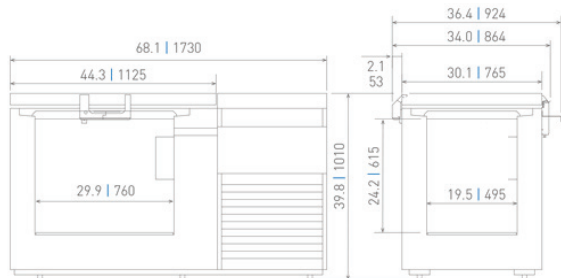

PHC Corporation of North America
1300 Michael Drive, Suite A, Wood Dale, IL 60191
Toll Free USA (800) 858-8442, Fax (630) 238-0074
www.phc.com/us/biomedical

¹⁾ Exterior dimensions of main cabinet only, excluding handle and other external projections
²⁾ Current warranty offered at time of printing and may be subject to change; US and Canada only
³⁾ Air temperature measured at freezer center, ambient temperature +30 $^{\circ}\text{C}$, no load
⁴⁾ Nominal value, background noise 51 dB(A)

Specifications are subject to change without notice.
For latest specification information contact PHC Corporation of North America.
Performance data herein is based on independent testing at time of publication.